

TLX High Volume Fiberglass Reinforced Microwave Substrate

TLX offers reliability in a wide range of RF applications. This material is versatile due to its 2.45 - 2.65 DK range and available thicknesses and copper cladding. It is suitable for low layer count microwave designs.

TLX PTFE fiberglass laminates are ideal for use in radar systems, mobile communications, microwave test equipment, microwave transmission devices and RF components.

TLX is a workhorse in the RF microwave substrate world where the fiberglass offers mechanical reinforcement wherever a substrate experiences severe environments such as: resistance to creep for PWBs bolted to a housing that encounter high levels of vibration during space launch, high temperature exposure in engine modules, radiation resistance in space (see NASA's website for low outgassing materials), antenna for warships that undergo extreme environments at sea and a substrate for altimeters that see a wide range of temperatures during flight.

The wide range of dielectric constants available enable the manufacture of couplers, splitters, combiners, amplifiers, antenna and other components.

Taconic is a world leader in RF laminates and high speed digital materials, offering a wide range of high frequency laminates and prepregs. These advanced materials are used in the fabrication of antennas, multilayer RF and high speed digital boards, interconnections and devices.

TLX exceeds PIM requirements in PCBs of -153 dBc (measured between 880 and 960 MHz, between 1710 and 1880 MHz and between 1920 and 2170 MHz at 20 W power) with CL1/CL1 cladding when processed with today's state-of-the-art processes and process parameters.

Benefits & Applications:

- Excellent mechanical & thermal properties
 - Low and stable Dk
 - Dimensionally stable
 - Low moisture absorption
 - Tightly controlled DK
 - Low DF
 - UL 94 VO rating
 - For low layer count microwave designs
-
- Antennas
 - Mixers, splitters, filters & combiners
 - Passive Components



North & South America

Taconic - Headquarters
Petersburgh, NY 12138
Tel: 518-658-3202 / 1-800-833-1805
addinfo@4taconic.com

Europe/Middle East/Australia

Taconic International Ltd.
Republic of Ireland
Tel: +353-44-9395600
add@4taconic.com

Asia

Korea Taconic Company
Republic of Korea
Tel: +82-31-704-1858
sales@taconic.co.kr

China

Taconic Advanced Material (Suzhou) Co., Ltd.
Suzhou City, China
Tel: +86-512-8718-9678
tssales@taconic.co.kr

An ISO 9001 Registered Company
www.taconic-add.com

Commercial and Government Entity (CAGE) Code: 1C6Q9

TLX-8 Typical Values

Property	Test Method	Unit	Value	Unit	Value
Dk @ 10 GHz	IPC-650 2.5.5.3		2.55		2.55
Df @ 1.9 GHz	IPC-650 2.5.5.5.1		0.0012		0.0012
Df @ 10 GHz	IPC-650 2.5.5.5.1		0.0017		0.0017
Dielectric Breakdown	IPC-650 2.5.6	kV	>45	kV	>45
Moisture Absorption	IPC-650 2.6.2.1	%	0.02	%	0.02
Flexural Strength (MD)	ASTM D 790	psi	28,900	N/mm ²	
Flexural Strength (CD)	ASTM D 790	psi	20,600	N/mm ²	
Tensile Strength (MD)	ASTM D 902	psi	35,600	N/mm ²	
Tensile Strength (CD)	ASTM D 902	psi	27,500	N/mm ²	
Elongation at Break (MD)	ASTM D 902	%	3.94	%	3.94
Elongation at Break (CD)	ASTM D 902	%	3.92	%	3.92
Young's Modulus (MD)	ASTM D 902	kpsi	980	N/mm ²	
Young's Modulus (CD)	ASTM D 902	kpsi	1,200	N/mm ²	
Young's Modulus (MD)	ASTM D 3039	kpsi	1,630	N/mm ²	
Poisson's Ratio	ASTM D 3039		0.135	N/mm	
Peel Strength (1 oz. ed)	IPC-650 2.4.8 Sec. 5.2.2 (Thermal Stress)	lbs./linear inch	15	N/mm	
Peel Strength (1 oz. RTF)	IPC-650 2.4.8 Sec. 5.2.2 (Thermal Stress)	lbs./linear inch	17	N/mm	
Peel Strength (½ oz. ed)	IPC-650 2.4.8.3 (Elevated Temp.)	lbs./linear inch	14	N/mm	
Peel Strength (½ oz. ed)	IPC-650 2.4.8 Sec. 5.2.2 (Thermal Stress)	lbs./linear inch	11	N/mm	
Peel Strength (1 oz. rolled)	IPC-650 2.4.8 Sec. 5.2.2 (Thermal Stress)	lbs./linear inch	13	N/mm	2.1
Thermal Conductivity	ASTM F433/ASTM 1530-06	W/M*K	0.19	W/M*K	0.19
Dimensional Stability (MD)	IPC-650 2.4.39 Sec. 5.4 (After Bake)	mils/in.	0.06	mm/M	
Dimensional Stability (CD)	IPC-650 2.4.39 Sec. 5.4 (After Bake)	mils/in.	0.08	mm/M	
Dimensional Stability (MD)	IPC-650 2.4.39 Sec. 5.5 (Thermal Stress)	mils/in.	0.09	mm/M	
Dimensional Stability (CD)	IPC-650 2.4.39 Sec. 5.5 (Thermal Stress)	mils/in.	0.10	mm/M	
Surface Resistivity	IPC-650 2.5.17.1 Sec. 5.2.1 (Elevated Temp.)	Mohm	6.605 x 10 ⁸	Mohm	6.605 x 10 ⁸
Surface Resistivity	IPC-650 2.5.17.1 Sec. 5.2.1 (Humidity Cond.)	Mohm	3.550 x 10 ⁶	Mohm	3.550 x 10 ⁶
Volume Resistivity	IPC-650 2.5.17.1 Sec. 5.2.1 (Elevated Temp.)	Mohm/cm	1.110 x 10 ¹⁰	Mohm/cm	1.110 x 10 ¹⁰
Volume Resistivity	IPC-650 2.5.17.1 Sec. 5.2.1 (Humidity Cond.)	Mohm/cm	1.046 x 10 ¹⁰	Mohm/cm	1.046 x 10 ¹⁰
CTE (X axis) (25-260 °C)	IPC-650 2.4 .41/ASTM D 3386	ppm/°C	21	ppm/°C	21
CTE (Y axis) (25-260 °C)	IPC-650 2.4 .41/ASTM D 3386	ppm/°C	23	ppm/°C	23
CTE (Z axis) (25-260 °C)	IPC-650 2.4 .41/ASTM D 3386	ppm/°C	215	ppm/°C	215
Density (Specific Gravity)	ASTM D 792	g/cm ³	2.25	g/cm ³	2.25
T _d (2% Weight Loss)	IPC-650 2.4.24.6 (TGA)	°C	535	°C	
T _d (5% Weight Loss)	IPC-650 2.4.24.6 (TGA)	°C	553	°C	
Flammability Rating	UL 94		V-0		V-0

All reported values are typical and should not be used for specification purposes. In all instances, the user shall determine suitability in any given application.

TLX High Volume Fiberglass Reinforced Microwave Substrate

Dielectric Constant & Dissipation Factor Across Product Line:


TLX Typical Values						
Property	Test Method	TLX-6	TLX-7	TLX-8	TLX-9	TLX-0
Dk @ 10 GHz	IPC-650 2.5.5.3	2.65	2.60	2.55	2.50	2.45
Df @ 1.9 GHz	IPC-650 2.5.5.5.1	0.0016	0.0014	0.0012	0.0010	0.0009
Df @ 10 GHz	IPC-650 2.5.5.5.1	0.0022	0.0020	0.0017	0.0015	0.0012

Outgassing Properties Across Product Line:


TLX Typical Values							
Property	Test Method	Units	TLX-6	TLX-7	TLX-8	TLX-9	TLX-0
Outgassing (% TML)	ASTM E 595	24 H 257 °F @ $\leq 5 \times 10^{-5}$ Torr	0.09	0.02	0.03	0.02	0.06
Outgassing (% CVCM)	ASTM E 595	24 H 257 °F @ $\leq 5 \times 10^{-5}$ Torr	<0.01	0.00	0.00	0.01	0.00
Outgassing (% WVR)	ASTM E 595	24 H 257 °F @ $\leq 5 \times 10^{-5}$ Torr	0.06	0.01	0.01	0.00	0.00

As reported by NASA. See http://outgassing.nasa.gov/og_disclaimer.html

TLX has a long space heritage and is used wherever a woven fiberglass reinforcement is required.

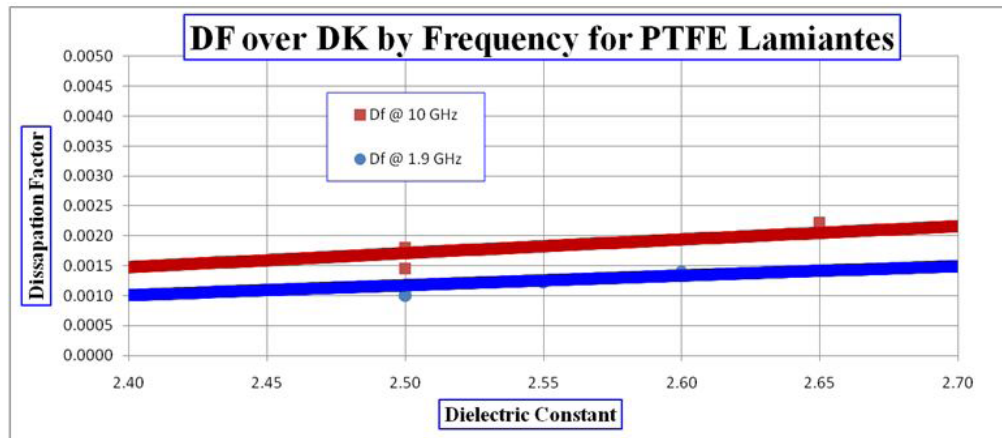

TLX has $\sim \pm 2\%$ variation in DK from -55 to 125 °C. If more temperature stability is required, TSM-DS3 should be considered.

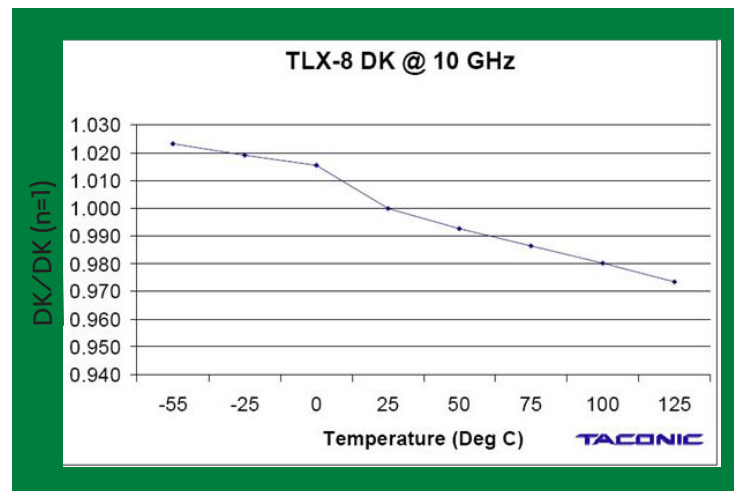

TLX High Volume Fiberglass Reinforced Microwave Substrate

Designation	Dk	Dielectric Thickness	
		Inches	mm
TLX-0	2.45+/- 0.04	0.0050 - 0.250	0.127 - 6.35
TLX-9	2.50+/- 0.04	0.0020 - 0.250	0.05 - 6.35
TLX-8	2.55+/- 0.04	0.0025 - 0.250	0.064 - 6.35
TLX-7	2.60+/- 0.04	0.0035 - 0.250	0.089 - 6.35
TLX-6	2.65+/- 0.04	0.0035 - 0.250	0.089 - 6.35

Available Sheet Sizes	
Inches	mm
12 x 18	304 x 457
16 x 18	406 x 457
18 x 24	457 x 610
16 x 36	406 x 914
24 x 36	610 x 914
18 x 48	457 x 1220
36 x 48	914 x 1220

TLX is noteworthy in that it is available as a very thin laminate for coupler type applications

TLX can be combined with any of Taconic's available copper claddings. The surface of TLX has been optimized for copper adhesion.

Please see our Product Selector Guide for information on available copper cladding.

An example of our part number is: **TLX-9-0310-CH/CH - 18" x 24" (457 mm x 610 mm)**

